ORDER NO. ARD-7806040C

1597

Service Manual

RP-9170

Remote Control Box

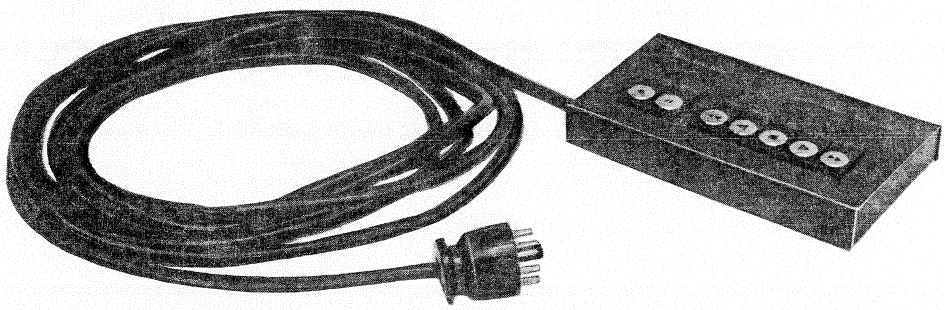

RP-9170 is designed for Model RS-1700.

Specifications

Dimensions:	19.0 cm (W) × 3.3 cm (H) × 10.7 cm (D) [7-1/2" (W) × 1-1/4" (H) × 4-1/4" (D)]
Weight:	1.1 kg (2-1/2 lbs.)
Cord lenght:	5 m (16-3/8 ft.)
Connection plug:	12-pin type

Weight and dimensions shown are approximate.

Technics

Matsushita Electric Trading Co., Ltd.
P.O. Box 288, Central Osaka Japan

1597

SCHEMATIC DIAGRAM MODEL RP-9170

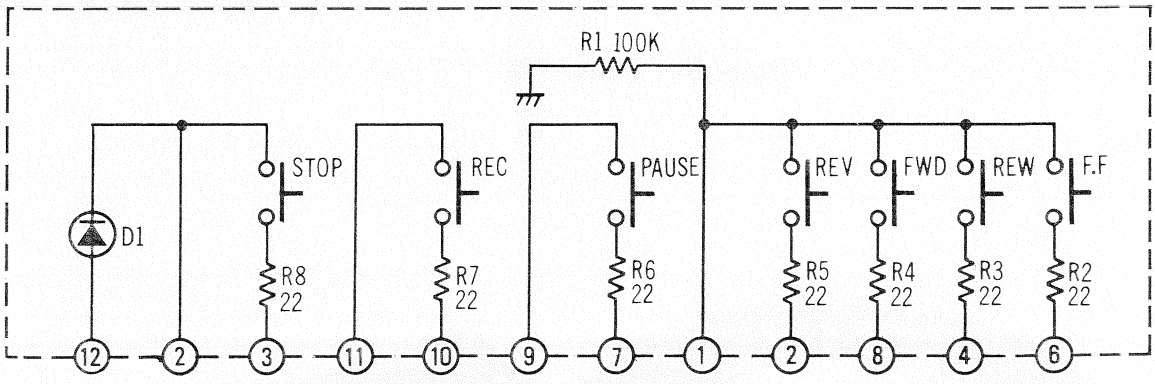

NOTE: Resistor values are in ohms (Ω), 1/4 watt unless specified otherwise.
K = 1,000Ω.

WIRING CONNECTION DIAGRAM

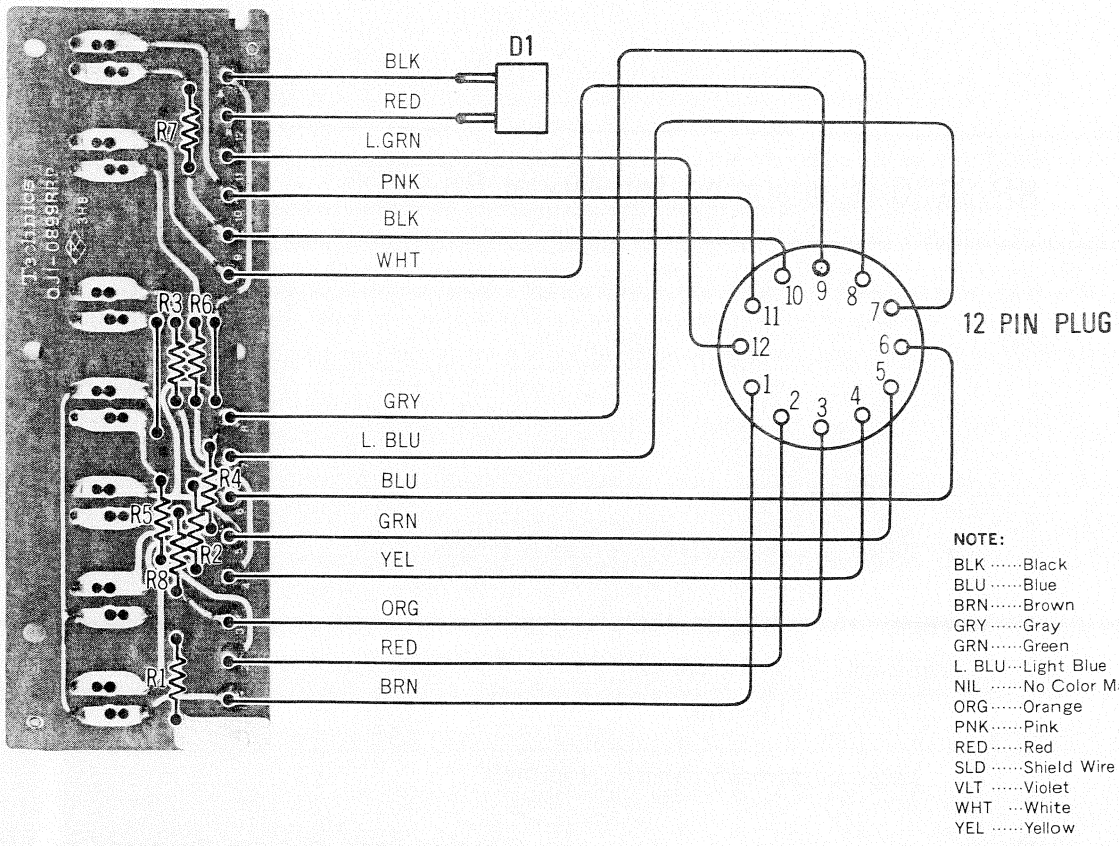

NOTE:

BLK ·····Black
BLU ·····Blue
BRN·····Brown
GRY·····Gray
GRN·····Green
L. BLU···Light Blue
NIL ·····No Color Mark
ORG·····Orange
PNK·····Pink
RED·····Red
SLD ·····Shield Wire
VLT ·····Violet
WHT ···White
YEL ·····Yellow

PARTS LOCATION

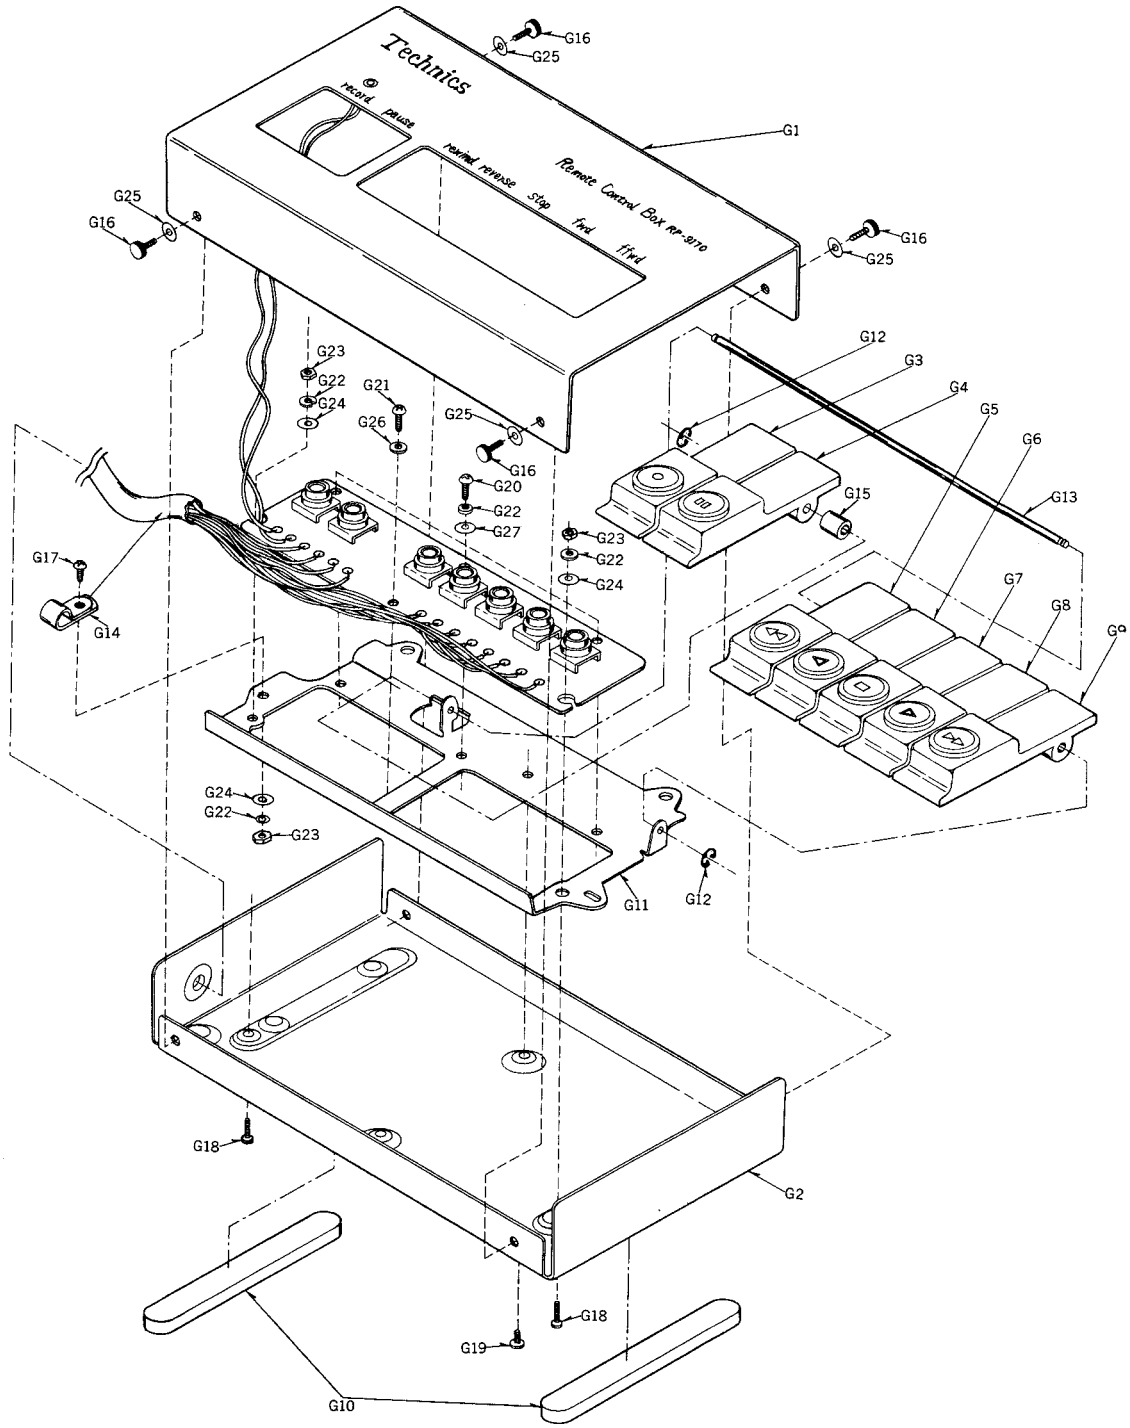

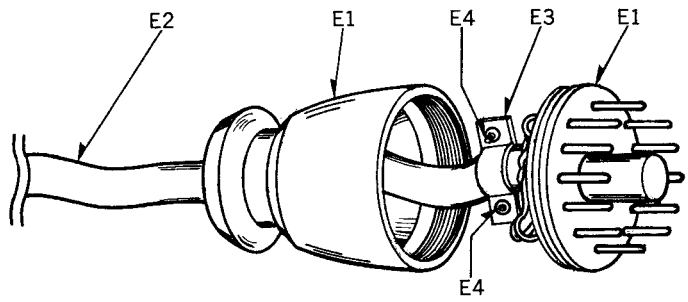

REPLACEMENT PARTS LIST MODEL RP-9170 (Technics)

Ref. No.	Part No.	Part Name & Description	Pcs/ Set	Remarks
		RESISTORS		
R1	ERD25TJ104	Carbon Resistor	1	SD SUPPLY
R2, 3, 4, 5, 6, 7, 8				
	ERD25TJ220	〃	7	〃
		DIODE		
D1	LN25D	Light Emitting Diode	1	
		SWITCHES		
S1, 2, 3, 4, 5, 6, 7				
	EVQPAR11K	Push Switch	7	
		ELECTRICAL PARTS		
E1	QJP0958	12 Pin Plug	1	
E2	QFC2037	Cable	1	
E3	QTD1175	Cord Stopper	2	
E4	XSN2+6	Screw ⊕2×6	2	
		CABINET PARTS		
G1	QYP0778	Panel Assembly	1	
G2	QGC1085	Bottom Cover	1	
G3	QXB0500	Record Button Assembly	1	
G4	QXB0501	Pause Button Assembly	1	
G5	QXB0505	Rewind Button Assembly	1	
G6	QXB0503	Reverse Button Assembly	1	
G7	QXB0506	Stop Button Assembly	1	
G8	QXB0502	Forward Button Assembly	1	
G9	QXB0504	Fast Forward Button Assembly	1	
G10	QBG1580	Rubber Cushion	2	
G11	QMF1942	Button Holding Angle	1	
G12	XUC3FT	Stop Ring	2	
G13	QMN2142	Shaft	1	
G14	QTD1246	Cord Stopper	1	
G15	QMC0050	Collar	1	
G16	XVE3A6FZS	Screw ⊕3×6	4	
G17	XSN3+8S	Screw ⊕3×8	1	
G18	XSS3+6S	Screw ⊕3×6	2	
G19	XTN3+8B	Screw ⊕3×8	1	
G20	XSN3+6S	Screw ⊕3×6	3	
G21	XSN3+6S	〃	1	
G22	XWA3B	Spring Washer	6	
G23	XNG3ES	Nut	3	
G24	XWE3	Washer	3	
G25	XWE3	〃	4	
G26	QBK7123	Fiber Washer	1	
G27	XWG3	Flat Washer	3	

Printed in Japan